


3" K-13 ACOUSTIC/THERMAL INSULATION ASTM C-423 ON 1.5" RIBBED METAL DECK

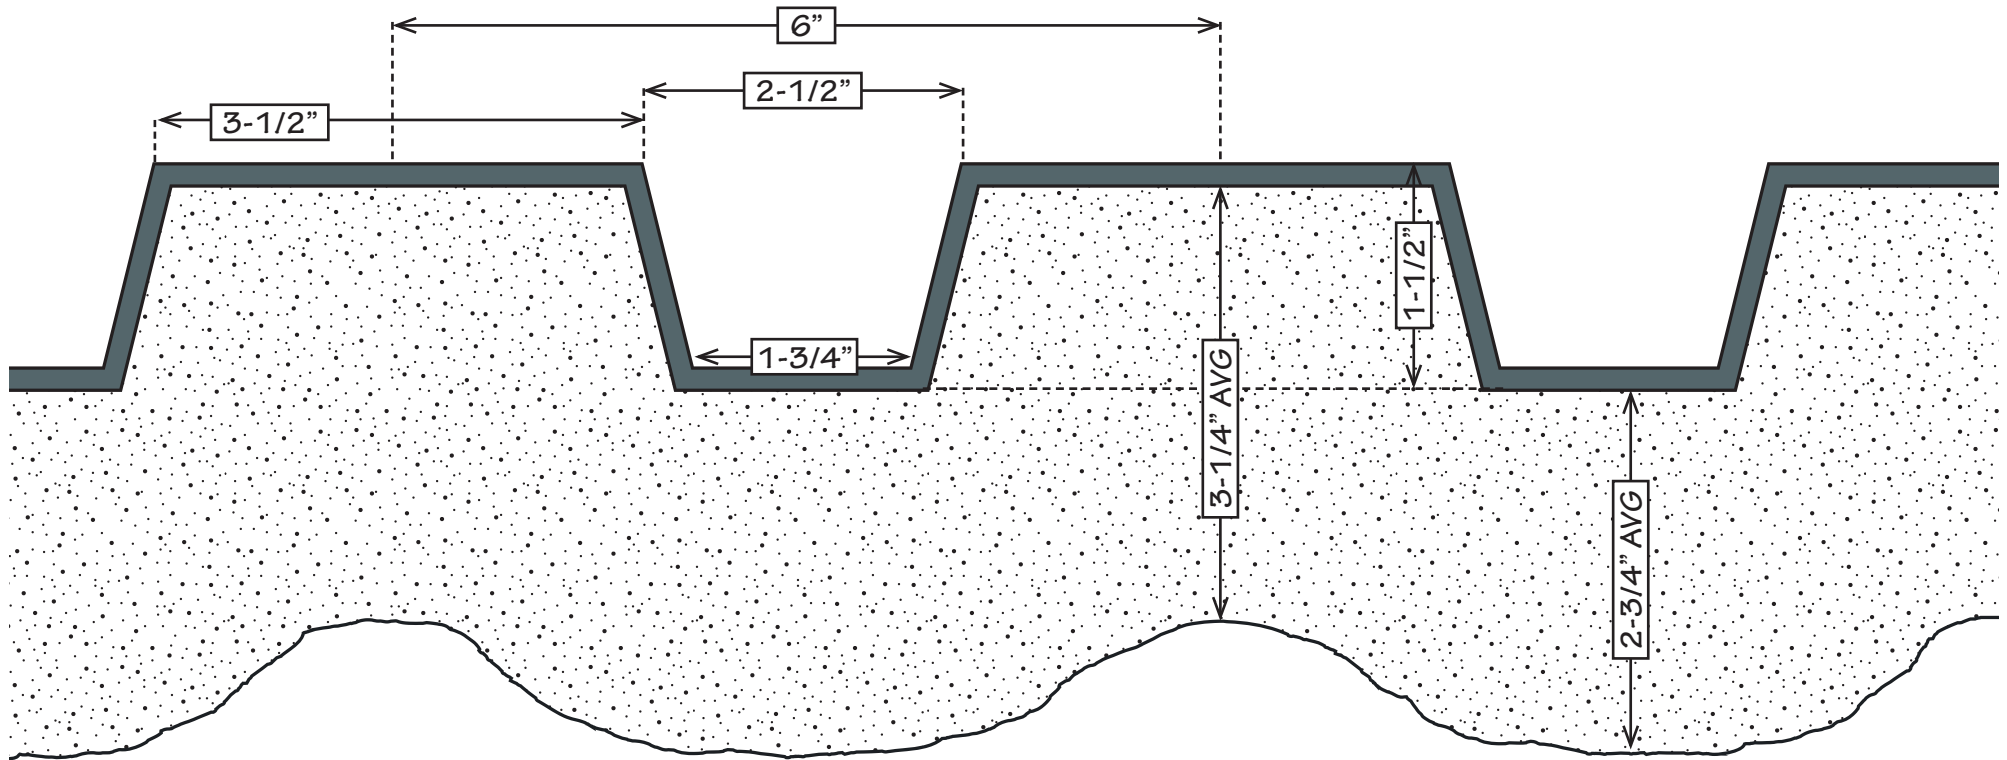

K-13 ACOUSTIC/THERMAL INSULATION ASTM C-423 ON 1.5" RIBBED METAL DECK*							
INCHES	125 hZ	250 hZ	500 hZ	1,000 hZ	2,000 hZ	4,000 hZ	NRC
1.5"	0.36	0.89	1.26	1.07	1.01	1.00	1.05
2"	0.56	0.94	1.22	1.04	0.99	0.99	1.05
2.5"	0.77	0.99	1.17	1.02	0.97	0.99	1.05
3"	0.97	1.04	1.13	0.99	0.95	0.98	1.05

*Some Values Interpolated

DATE:

NOTES:



**INTERNATIONAL
CELLULOSE
CORPORATION**

12315 ROBIN BLVD. HOUSTON, TX 77045
icc@spray-on.com | 800.444.1252
www.spray-on.com