


1/2" SONAKRETE ASTM C-423 ON SOLID BACKING



SONAKRETE ASTM C-423 ON SOLID BACKING							
INCHES	125 hZ	250 hZ	500 hZ	1,000 hZ	2,000 hZ	4,000 hZ	NRC
0.25"	0.01	0.07	0.39	0.69	0.83	0.87	0.50
0.375"	0.06	0.11	0.46	0.77	0.84	0.89	0.55
0.5"	0.01	0.16	0.49	0.89	1.03	0.97	0.65
0.75"	0.25	0.48	0.81	0.85	0.85	0.94	0.75

DATE:		NOTES:	

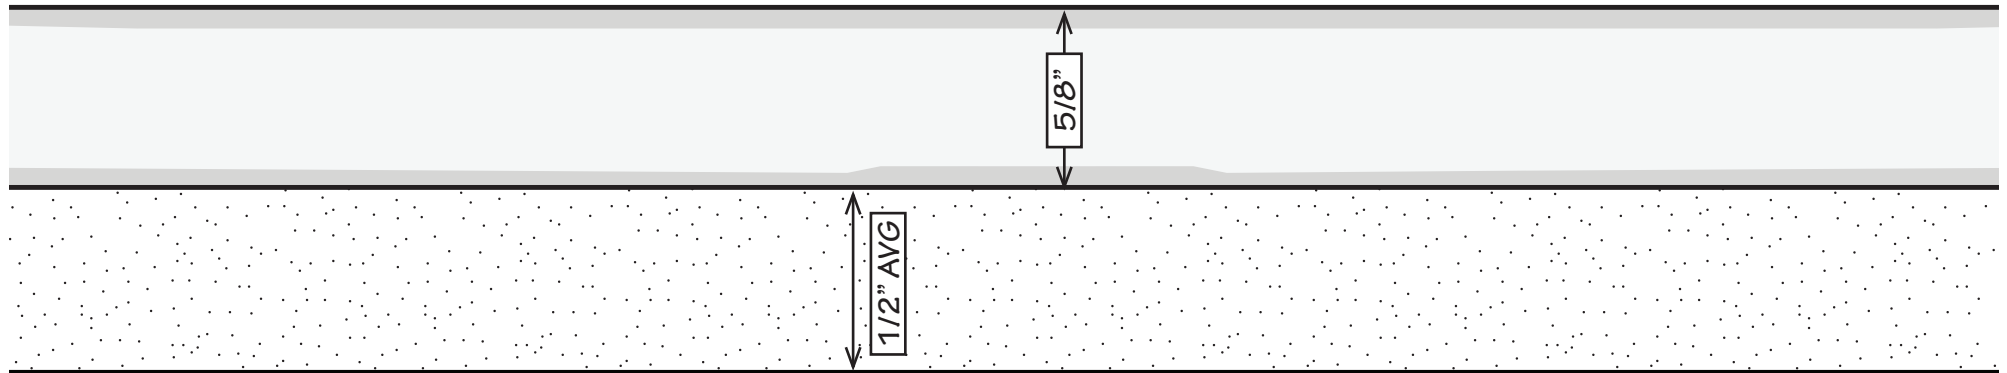

**INTERNATIONAL
CELLULOSE
CORPORATION**

12315 ROBIN BLVD. HOUSTON, TX 77045
icc@spray-on.com | 800.444.1252
www.spray-on.com