

CELLULOSE FIRE-RATED WALL ASSEMBLIES

FOR USE IN OVER 65
ONE, TWO, & THREE-HOUR
UL FIRE-RESISTANT-RATED
WALL ASSEMBLIES

WOOD ASSEMBLIES

U023, U032, U036, U040, U305, U309, U311, U317,
U321, U326, U330, U331, U333, U338, U339, U340,
U341, U342, U344, U354, U355, U356, U395, U403,
U410, U411, U412, U420, U425, U426, U428, U429,
U434, U435, U436, U438, U440, U460, U462, U463,
U465, U466, U467, U470, U471, U477, U478, U495,
U498, U499, U528, U622, U646, U647, U648, U651

METAL ASSEMBLIES


V401, V410, V414, V415,
V416, V421, V455



STC 56

RAL TL09-233


- 16" OC
- TWO PARALLEL 2"X4" BASE PLATES, SPACED 1"
- ONE LAYER 5/8" GYPSUM BOARD EACH SIDE

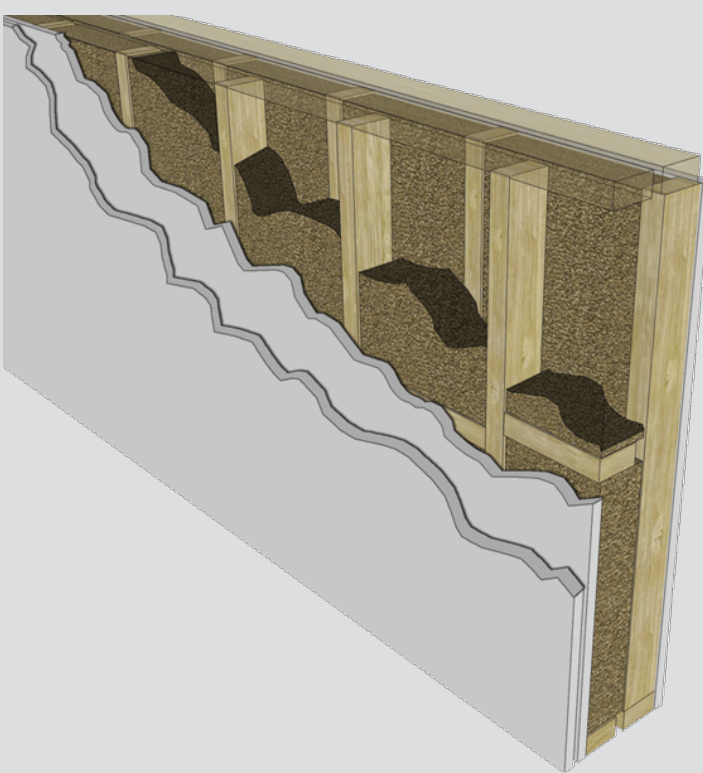

STC 61

RAL TL09-234

- 16" OC
- TWO PARALLEL 2"X4" BASE PLATES, SPACED 1"
- ONE LAYER 5/8" GYPSUM BOARD ONE SIDE
- TWO LAYERS 5/8" GYPSUM BOARD ONE SIDE

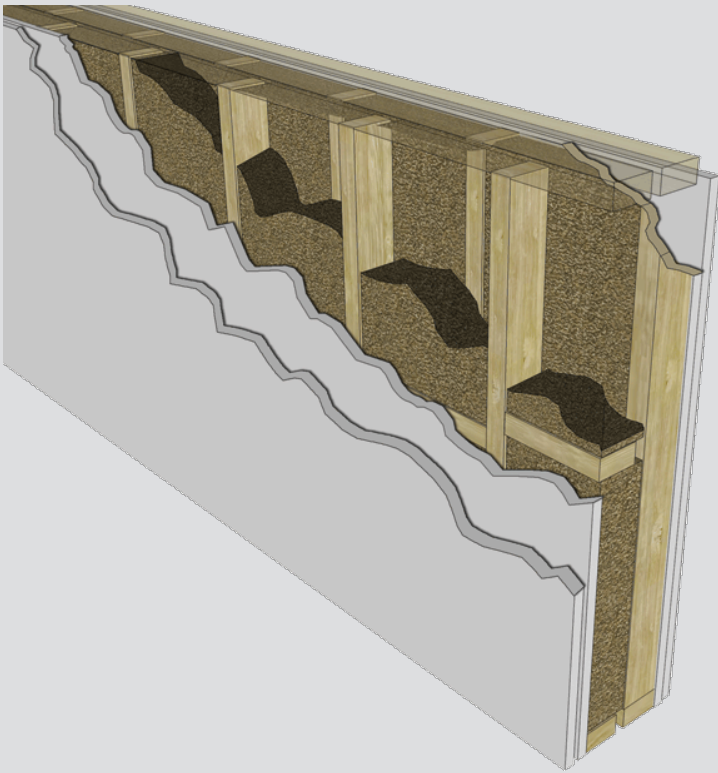

STC 64

RAL TL09-313

- 16" OC
- TWO PARALLEL 2"X4" BASE PLATES, SPACED 1"
- TWO LAYERS 5/8" GYPSUM BOARD EACH SIDE